

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 088 638
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 83301306.3

(51) Int. Cl.³: **B 01 J 8/18, C 08 F 10/00,**
C 08 F 2/34

(22) Date of filing: 09.03.83

(30) Priority: 10.03.82 IT 2006282

(71) Applicant: Montedison S.p.A., 31, Foro Buonaparte,
I-20121 Milan (IT)

(43) Date of publication of application: 14.09.83
Bulletin 83/37


(72) Inventor: Govoni, Gabriele, 63, Via Pilastrò, Renazzo
Ferrara (IT)
Inventor: Corazzari, Canzio, 250, Via Virgiliana, Pilastrò
Ferrara (IT)
Inventor: Di Stefano, Giovanni, 188, Via Marconi, Ferrara
(IT)
Inventor: Loconsolo, Mauro, 71, Via Ravenna, Ferrara
(IT)

(84) Designated Contracting States: AT BE DE FR GB NL SE

(74) Representative: Whalley, Kevin et al, Marks &
Clerk 57/60 Lincoln's Inn Fields, London WC2A 3LS (GB)

(54) Distributor for a fluidized bed reactor.

(57) A fluidized bed reactor (1), suitable for recycling a fluidization gas containing in suspension particles of solid material, has a gas distributor (13) consisting of a double-coned body or of a series of concentric cones provided on their lateral surfaces with ribs or fins (18) forming gas inflow channels (19) shaped in such a way and with such an inclination as to allow the passage of the solid particles dragged along by the gas flow, and such as to hinder the outflow of the solid material that has been fluidized, when the flow of the gas is interrupted.

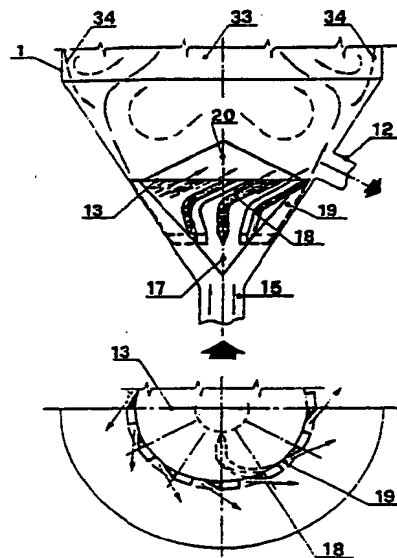

EP 0 088 638 A2

ACTORUM AG

Best Available Copy

"DISTRIBUTOR FOR A FLUIDIZED BED REACTOR"

This invention relates to a distributor for a fluidized bed reactor.

In apparatus for chemical-physical operations in which a gas is brought into contact with a solid material in the shape of particles, maintaining these latter in the state of a fluidized bed, a distributor is provided for distributing the gas sent into the fluidized bed. The importance of the distributor for the smooth and regular and correct working of the fluidized bed apparatus is well known.

10 In fact, on the distributor depends the taking place of the fluidization, the uniform distribution of the gas in the bed, with the absence of dead zones, and the frequency and the dimensions (size) of bubbles in the bed, with appreciable effects on the mixing of the solids and on
15 the exchange of matter and heat inside the system.

Usually it is necessary that the distributor shall ensure a uniform distribution of the gas; shall hinder the fall of solids under the distributor during its working as well as during cessation of working; and that it shall
20 have such a shape as to minimize the losses of load and damage due to erosion.

There are many types of distributors that will ensure the above performances and which consist substantially of a plate provided with numerous small holes which will allow
25 the passage of gas but not that of the solid particles that form the fluidized bed.

The present invention provides a distributor for the distribution of gases and vapours in fluidized beds of solid particles which, in addition to the previously
30 specified characteristics, will have that of being

- 2 -

passable by the solids dragged along by the gases and vapours that are re-cycled back into the bed.

More particularly, the present invention in one aspect provides a distributor of fluidization gases for a fluidized bed reactor, which comprises a double cone body comprising:

- 5
- 10
- 15
- 20
- 25
- 30
- (a) a lower conical element, arranged in use with the vertex thereof directed downwards, provided with more than two ribs on the lateral surface thereof, the said ribs having such a profile as to form, together with the wall of a containing shell for the distributor, flow channels having a decreasing cross-section in an upward direction so that the velocity of gas flowing therealong will increase gradually and correspondingly, the ribs being arranged diametrically opposite to each other with an axial symmetry and with an inclination with respect to the vertical such as to impart to the inflowing gas current a tangential component, the profile and inclination of the ribs being such as to allow the passage of solid particles entrained by the inflowing gas, and such as to hinder the falling back of the particles of the fluidized bed whenever the feeding in of the gas is interrupted; and
 - (b) an upper conical element arranged in use with the vertex thereof directed upwards, superimposed onto the lower conical element and having the function of activating the circulation of the solid in the fluidized bed, eliminating dead or stagnation zones.

The distributor of the present invention essentially consists of two conically-shaped elements. The lower one has its vertex pointing downwards and is provided with more than two ribs or fins (referred to hereinafter in this specification only as ribs), but preferably with from 6 to 24 ribs, having such a profile as to form channels (grooves) for the passage of fluids and with a decreasing cross-section starting from the vertex and directed towards the base of the conical element, in which channels the flow speed of the gas will gradually increase. The ribs forming these channels are arranged in axial symmetry with respect to each other and are inclined with respect to the vertical axis such that the powdery material of the fluidized bed shall not descend along such channels during suspension or cessation of the fluidizing process (suspension of the emission of gases). Moreover, the inclination of the ribs imparts to the gas flow a tangential component which will ensure a good distribution of the gas, avoiding the formation of dead zones.

The upper conical element has its vertex pointing upwards and has the function of activating the circulation of the solid in the fluidized bed, in order to achieve at all locations a good mixing through and to avoid the formation of dead zones and stagnation. This conical element may also take the shape of a truncated cone and may be provided with a central duct for the discharge of the powdery material of the fluidized bed.

The distributor according to the invention may be provided with a series of ribs arranged on concentric conical elements, as described in more detail subsequently.

The distributor may also be constructed as a rotating

distributor, again as described in more detail subsequently, arranged with a particular assymetry that will favour the passage of the gas preferably to a peripheral zone to the disadvantage of the diametrically opposite zone; this is achieved by rotating the distributor at a suitable speed, preferably from 3 to 30 rpm. Thereby there is achieved a flow rate at which the gas will fluidize the bed in one zone and the solids will drop into another zone, the position of these zones being continuously varied by the rotation of the distributor.

The inflowing of the gas into the distributor may be axial or tangential, and the discharging of the solids may be likewise effected through the fluidized bed laterally or from the bottom axially. The distributor may also be traversed axially by a rotating shaft for the control of possible internal scrapers intended for ensuring a mild stirring and the removal from the walls of possible agglomerations of solid.

The flow speed of the gas in the fluidized bed should usually be equal to or greater than the speed of minimum fluidization, and preferably should be from 2 to 50 times the speed of minimum fluidization. In any case, such speed is a function of the particular substance used and of the size and morphology of the solid particles.

In the case of a mechanically stirred bed, the flow speed of the gas may be lower than the speed of minimum fluidization.

In any case there must be ensured an effective mixing through of the fluidized bed in order to achieve a fast renewal at all locations of the fluidized bed itself. As a result, with the distributor according to the

invention, the flow rate of the solids determines a downward flow of the solids in the vicinity of the walls of the reactor and an upward flow in correspondence with the central axis of the reactor.

- 5 Also with granular fluids of a low flowability and with a high stickiness it is possible to operate without encountering problems of pollution of the reactor or of an ineffective distribution of the gas.

10 The invention in another aspect provides a fluidized bed reactor provided with a distributor according to the first aspect of the invention and further comprising means for recycling of the gas, wherein the distributor and the recycling means allow the passage of solid particles of the fluidized material entrained by the
15 recycling gas.

In order to avoid soilings in the cylindrical and frusto-conical regions of the reactor walls, two systems may be adopted.

20 The first, already described in U.S. Patent No. 3 298 792, consists in providing a rotating blade rotating at more than 1 revolution per minute, preferably from 1 to 10 revolutions per minute, which exerts a scraping action on the reactor walls in order to hinder the accumulation of layers of solid on the walls themselves. This system
25 has proved fully effective in practice.

The second system, which is based on the observation that an excellent descaling agent for the walls is the solid itself when it is kept under vigorous motion, consists in inserting in the upper zone of the reactor
30 a rotating separator, which will generate a flow of solid which from the centre will be violently pushed towards the wall of the reactor by centrifugal force,

thereby exerting a cleaning action.

Such a rotating separator is described in Italian Patent Application No. 23,875 A/81.

5 The aim of the cleaning of the internal surfaces of the reactor is attained in this particular case with a means that causes also a separation of the solids dragged along by the outflowing gas. As already indicated, this is not necessary because the gas distributor according to the invention has the characteristic that
10 it may be traversed by the particles of the solid; however, the separation effect obtained may be advantageous when exhaust gas for recycling must be free of dust because of requirements of the process or because of anti-pollution limitations or other reasons.

15 The invention in a further aspect provides a process for the polymerization and copolymerization of α -olefins in a gaseous phase, on a fluidized bed comprising polymerized material containing catalyst, wherein the process is carried out in a fluidized bed reactor
20 according to the invention.

The invention in a yet further aspect provides a process for the copolymerization of ethylene/propylene in a gaseous phase, on a fluidized bed comprising polymerized material containing catalyst, under such
25 processing conditions as to obtain an amorphous copolymer, wherein the process is carried out in a fluidized bed reactor according to the invention.

The invention will be further described, by way of example only, with reference to the accompanying
30 drawings, in which :

Figure 1 is a schematic view of a fluidized bed reactor according to one aspect of the present invention;

Figure 2 is a side and a plan view of one embodiment of a distributor of fluidization gases, according to the invention, for use in the fluidized bed reactor according to Figure 1;

5 Figure 3 is a side view of another embodiment of a distributor of fluidization gases, according to the invention, also for use in the fluidized bed reactor according to Figure 1;

10 Figures 4 and 5 are each a side and a plan view of further embodiments of distributors of fluidization gases, according to the invention, suitable for use in the fluidized bed reactor according to Figure 1; and Figure 6 is a graph of percentage cumulative weight against diameter of polymer particles.

15 In the drawings, like reference numerals indicate like parts.

The apparatus shown in Figure 1 comprises a fluidized bed reactor 1 the top of which is connected by a line 4 to a centrifugal compressor 2 for recycling of gas, which is in turn connected by a line 5 to a heat
20 exchanger 3 with lined piping. The heat exchanger 3 is connected by a line 6 to the base of the reactor 1. To the line 5 is connected a feed 7 of ethylene monomer (C_2^-) and a feed 8 of propylene monomer (C_3^-), while to the line 6 is connected a feed 9 of catalyst
25 containing copolymer base and a feed 10 of reaction activator. A recycling gas exhaust 11 leads from the line 4, and a lateral discharge 12 for polymer leads from adjacent the bottom of the reactor 1.

30 At the bottom of the reactor 1 is a gas distributor 13, while at the top of the reactor is a centrifugal separator 14 for polymer particles. The separator 14

is described in more detail in Italian Patent Application No. 23,875 A/81. Reference numeral 15 indicates current flowing into the reactor, with axial flow, while numeral 16 indicates current flowing out of the reactor.

The distributor 13 is shown in more detail in Figure 2, and comprises a lower conical element 17 arranged with its vertex directed downwards, and an upper conical element 20 arranged with its vertex directed upwards and superimposed onto the lower conical element. The conical element 17 has slanting and warped conveying ribs 18 and conveying channels 19 with decreasing cross-section, as shown.

As shown in Figure 3, the axial discharge 21 of polymer is from the bottom of the reactor, and a chamber 22 is formed with tangential inflow of current fed into the reactor, achieved with the help of an inclined or helical conveying plane 23, formed on the extension of a rib. The chamber 22 is defined by a cylindrical body 24 of the distributor and by the adjacent wall of the reactor 1. Figure 3 also shows conveying ribs 25 without warping.

Figure 4 shows a distributor 26 with upper and lower concentric conical elements 17 and 20 provided with a plurality of annular ribbed crowns. In this embodiment, the current flow 15 is through a plurality of channels, as shown.

Figure 5 shows a rotating distributor 27 with asymmetrical conveying channels, having a lateral side 28 of decreasing cross-section. The distributor 27 has a rotary tubular shaft 29 provided with a packing gland 30. Figure 5 also indicates by reference numeral 31 a lateral fluidization zone of the polymer, and by

reference numeral 32 a lateral polymer re-dropping zone. In this embodiment, as a result of the rotation of the distributor at a suitable speed, for example 3 to 30 rpm, there is achieved a flow rate at which the gas will fluidize the bed in the zone 31 and the solids will drop into the zone 32, the position of the zones 31 and 32 being continuously varied by the rotation of the distributor.

All the figures 1 to 4 show a zone 33 of entrainment of the polymer along the axis of the apparatus, and a zone 34 of the downward flow of the polymer near the wall of the fluidized bed reactor.

Reference numeral 39 (Figure 3) indicates inflow of current into the reactor with tangential flow.

Certain aspects of the embodiments described with reference to the drawings will now be referred to in more detail.

The compressor 2 consists of a device for the fluxing of the shaft behind the impeller or rotor, in order to avoid any solid approaching the gaskets and with the centrifugal impeller in action so that it may be traversed by the gas containing also considerable quantities of dust, and to be capable of ensuring such a flow rate as to maintain in the circuit sufficiently high speeds (greater than 5 mt/sec., and preferably 10-40 mt/sec.) so as to hinder any sedimentation of the powder along the connection lines 4,5 and 6, with possible ensuing clogging due to the accumulation of solid substance.

The heat exchanger 3, if necessary, should be of the pipe-in-pipe type. In the exchanger 3, the gas and the powders dragged along may be heated or cooled down

according to the requirements of the process, using as a fluid for the thermal exchange water, steam, oil or any other substance according to the specific case. Such service fluid passes along the external pipe, while the process gas passes along the internal pipe to which may be applied a series of longitudinal ribs on the gas side, in order to facilitate the disposal or acquisition of heat.

If the quantity of heat involved requires the installation in parallel of a plurality of pipes, in the sizing of the latter there must be imposed a speed of more than 5 mt/sec., and preferably a speed from 10 to 40 mt/sec.

In the case that the process requires a contribution of heat, the latter may be supplied by means of suitably arranged electrical heating elements.

The apparatus of this invention is particularly suitable for use in applications at a high pressure. In this case, because of the higher value of the density of the gases in circulation, there will be needed smaller sized apparatus, higher values of thermal exchange coefficient, reduced transportation rates in the connection lines and a reduced fluidization in the bed, and in the case of reactions there will be achieved improvements in the kinetics because of the increase in concentration of the reacting gases.

As already mentioned, for the satisfactory working of the circuit, it is determining that the gas flow that flows through the circuit has at each point a flow speed greater than 5 mt/sec., preferably from 10 to 40 mt/sec., in order to ensure an absolute reliability with respect to soiling and the avoidance of dead zones for the clogging of the dragged solid.

By way of example it may be mentioned that the apparatus of the invention is particularly suitable for reactions catalyzed by solid granular catalysts, with a gaseous product flowing out with the exhaust 11, possibly
5 filtered or separated from the residues of dragged solid.

Another suitable application of the apparatus of the invention is that of the polymerization in the gaseous phase of linear α -olefins for the preparation of
10 plastic polymers. In this case the process is operated with solid and gaseous reactants continuously fed in and continuous discharge of a solid granular product.

A particularly important application of the apparatus of the invention is its use in the production of ethylene-
15 -propylene plastic copolymers of the type described in Italian Patent Application No. 24,475 A/81.

In this case the apparatus comprises a circuit essentially consisting of a reactor 1, a centrifugal compressor 2, and a heat exchanger 3, connected together
20 as indicated in Figure 1. Into this circuit are fed in ethylene monomers 7, propylene monomers 8 and a possible reaction activator 10 and a homopolymeric polypropylene base 9 containing the catalyst, coming from a reaction in solution or in bulk or in a gaseous phase, possibly
25 after separation of the diluent.

The homopolymerization stage produces for each catalyst particle a stereospecific matrix of polypropylene with an isotacticity greater than 90%, but preferably greater than 95%, in such a quantity as to preferably constitute
30 60-90% by weight of the end product. Inside this matrix, in the copolymerization stage, there is produced and distributed with great regularity a predominantly amorphous copolymer having a composition of 25-75% by weight

of ethylene, preferably approximately 50% by weight of ethylene, in proportion to the remaining 10-40% by weight of the end product. The end product will have an ethylene content of up to 20% by weight. These
5 described characteristics are indicative, and in any case the product referred to is described in detail in Italian Patent Application No. 24,475 A/81.

Reactor 1 was made to operate at a pressure within the range of 2-40 kg/sq.cm and at a temperature of from 40°
10 to 100°C. The dwell time of the polymer in the fluid polymerization bed was from 0.5 to 4 hours, while the average composition ratio of the monomers in the gaseous phase, expressed as a ratio between the molar concentration of the ethylene and the sum of the molar concentrations of the ethylene and propylene, $C_2^- / C_2^- + C_3^-$
15 is within the range of 0.35 - 0.55. This parameter is in any case related to the quality of the copolymer to be produced and to the particular high-yield catalyst used in the reaction, and is controlled in order to
20 obtain the production of the desired copolymer. For this purpose the flow rates of the fed in monomers 7 and 8 and of the flow rate from the exhaust 11 are suitably adjusted.

The invention will be further described with reference
25 to the following illustrative Example.

E X A M P L E :

This example is based on tests on a pilot scale and was carried out in a continuous plant with an output capacity of 25 kg/hr of ethylene-propylene block copolymer. There
30 was used a gaseous-phase copolymerization apparatus as schematically represented in Figure 1, in which the gas distributor mounted at the bottom of the reactor 1 was of the type illustrated in Figure 2, with a lateral

discharge for the product.

5 The copolymeric base was produced according to a bi-
-stage process in a liquid monomer. There was employed
a catalyst prepared according to Example 1 of European
Patent No. 45,977 , which allows the
polymer to be obtained in the form of particles of a
spherical shape and in a restricted granulometry, as
shown in Figure 6.

10 The polymer in suspension in a liquid monomer was
separated from the propylene by flashing in a cyclone
and by then feeding it into a fluidized bed reactor.
For this purpose there was used a gaseous phase copoly-
merization reactor characterized by a fluidization rate
equal to 45 cm/sec.

15 The circulation speed of the gas-polymer mixture cir-
culating in the circuit of Figure 1 amounted to 12
mt/sec. in the line 4 and to 30 mt/sec. in the lines
5 and 6 and in the heat exchanger 3.

20 The operational conditions of the example are recorded
in Table 1 below; the characteristics of the obtained
copolymer are given in Table 2 below.

25 No soiling of the internal walls of the reactor nor
clogging of compacted polymer were detected and there
was achieved excellent control over the fluidization
without clogging or deposits of polymer in the external
circuit even after prolonged periods of operation of
more than 1000 hours running.

T A B L E 1

	Operational Conditions	U n i t	
	1st STAGE : Homopolymer	-	-
	Temperature	°C	70
5	Pressure	atm	equilibrium
	Dwell time	hours	1.3
	Melt flow rate "L"	g/10 min.	1.82
	Isotacticity index	%	96.7
	Yield	g.pol./g.CTZ	16,500
10	2nd STAGE : Homopolymer	-	-
	Temperature	°C	75
	Pressure	atm	equilibrium
	Dwell time	hours	1.3
	Melt flow rate "L"	g/10 min.	1.55
15	Isotacticity index	%	97
	Yield	g.pol./g.CTZ	28,500
	3rd STAGE : Copolymer	-	-
	Temperature	°C	70
	Pressure	atm	8
20	Dwell time	hours	1
	Bound ethylene	% by weight	10.9
	$C_2^- / (C_2^- + C_3^-)$ gaseous phase	mol/mol	0.43

T A B L E 2

	CHARACTERISTICS OF THE END PRODUCT	U n i t	
	Melt flow rate "L"	g/10 min.	1.72
5	Yield	g.pol./g.CTZ	36,000
	Mean polymer diameter	micron	1,500
	Fraction of polymer < 500 micron	%	2
10	Apparent poured / compacted density	g/cc	.0.47/0.52
	Flowability	sec.	16
	Flexural elasticity modulus	MPa	1,200
	Transition temperature (Ball Drop)	°C	< - 45
15	Izod C.I. impact resistance at 23°C	J/m	380
	Izod C.I. impact resistance at 0°C	J/m	115
	G l o s s	%	45
20	HDT (at 46 N/sq.cm)	°C	74

C L A I M S

1. A distributor(13) of fluidization gases for a fluidized bed reactor, characterized by comprising a double cone body comprising :

- 5 (a) a lower conical element(17), arranged in use with the vertex thereof directed downwards, provided with more than two ribs(18) on the lateral surface thereof, the said ribs having such a profile as to form, together with the wall of a containing shell for the distributor,
10 flow channels(19) having a decreasing cross-section in an upward direction so that the velocity of gas flowing therealong will increase gradually and correspondingly, the ribs being arranged diametrically opposite to each other
15 with an axial symmetry and with an inclination with respect to the vertical such as to impart to the inflowing gas current a tangential component, the profile and inclination of the ribs being such as to allow the passage of solid
20 particles entrained by the inflowing gas, and such as to hinder the falling back of the particles of the fluidized bed whenever the feeding in of the gas is interrupted; and
- 25 (b) an upper conical element(20), arranged in use with the vertex thereof directed upwards, superimposed onto the lower conical element and having the function of activating the circulation of the solid in the fluidized bed, eliminating dead or stagnation zones.

2. A distributor as claimed in Claim 1, characterized in that the said cone body is provided with an axial discharging duct(21) for the fluidized solid material.
- 5 3. A distributor as claimed in Claim 1 or 2, characterized in that the said cone body comprises concentric conical elements each having a series of ribs.
- 10 4. A fluidized bed reactor(1) characterized by being provided with a distributor(13) as claimed in any preceding claim and by further comprising means for the recycling of the gas, and further characterized in that the said distributor and the said recycling means allow the passage of solid particles of the fluidized material entrained by the recycling gas.
- 15 5. A fluidized bed reactor as claimed in Claim 4, characterized by being provided with a centrifugal separator.
- 20 6. A fluidized bed reactor as claimed in Claim 4 or 5, characterized in that the distributor is arranged eccentrically with respect to the vertical axis of the reactor, and in that the reactor further comprises means(29) for rotating the distributor.
- 25 7. A process for the polymerization and copolymerization of α -olefins in a gaseous phase, on a fluidized bed comprising polymerized material containing catalyst, characterized in that the process is carried out in a fluidized bed reactor as claimed in any of Claims 4 to 6.

- 5 8. A process for the copolymerization of ethylene/
/propylene in a gaseous phase, on a fluidized
bed comprising polymerized material containing
catalyst, under such processing conditions as to
obtain an amorphous copolymer, characterized in
that the process is carried out in a fluidized
bed reactor as claimed in any of Claims 4 to 6.

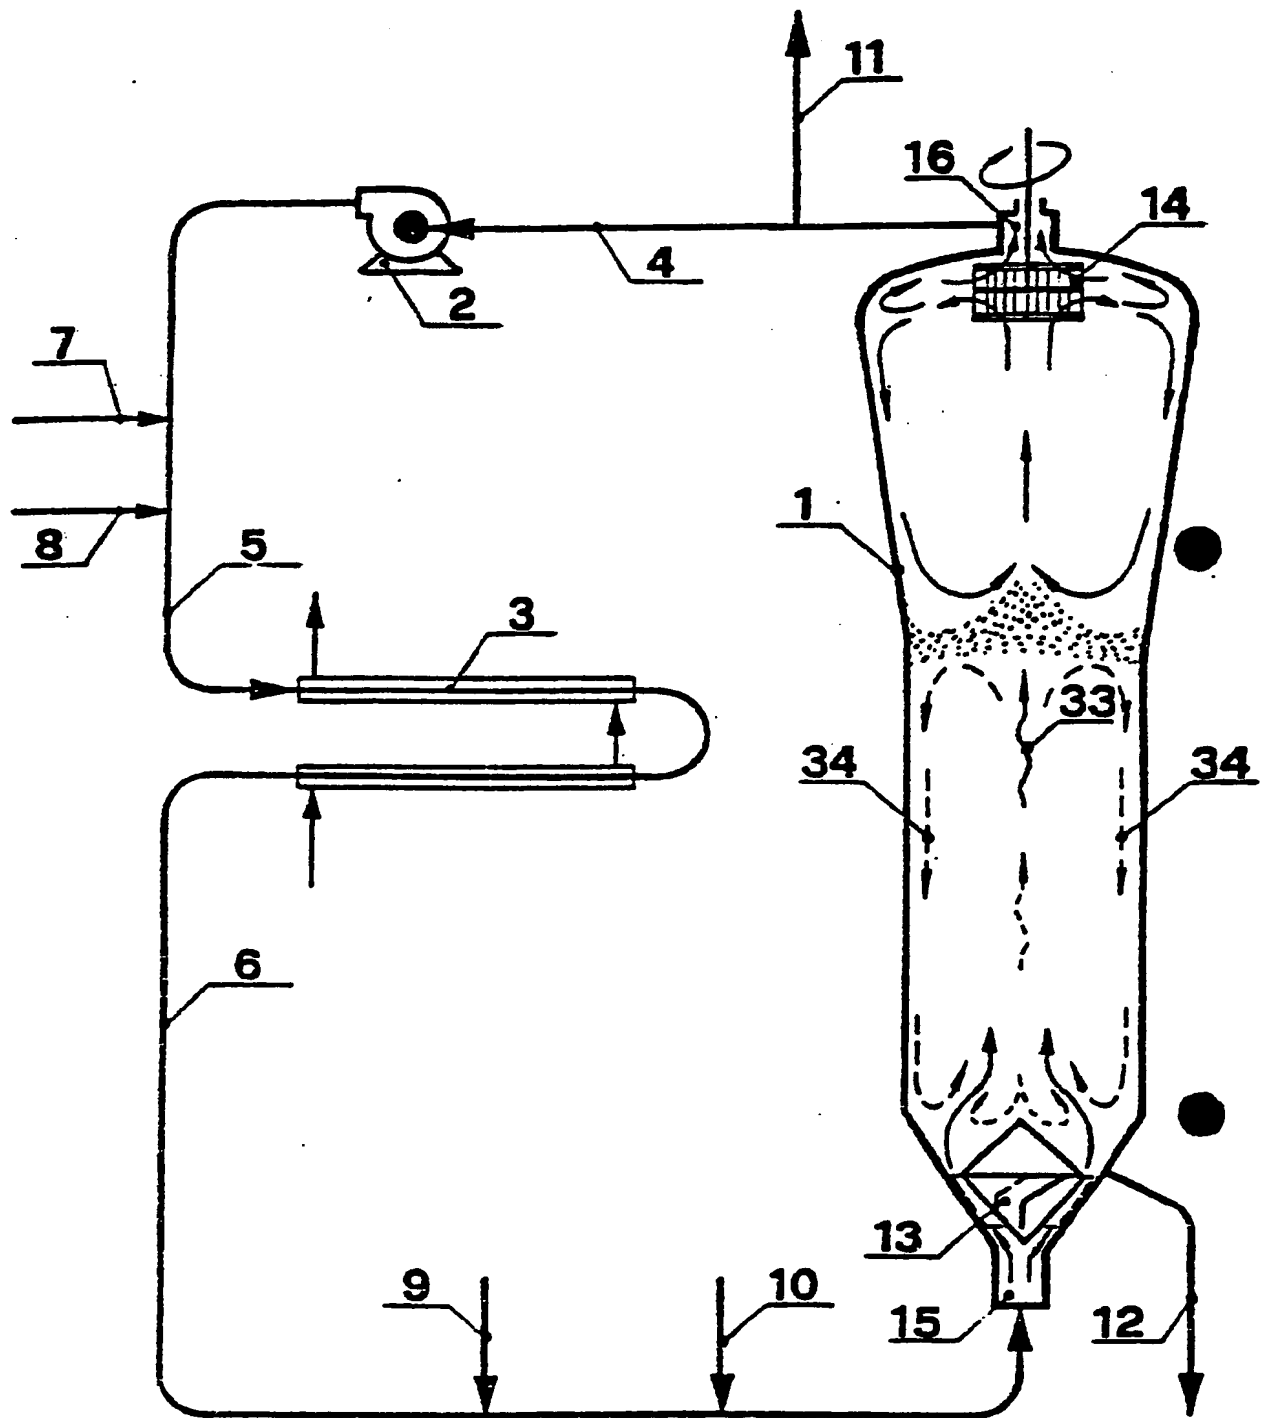


FIG. 1

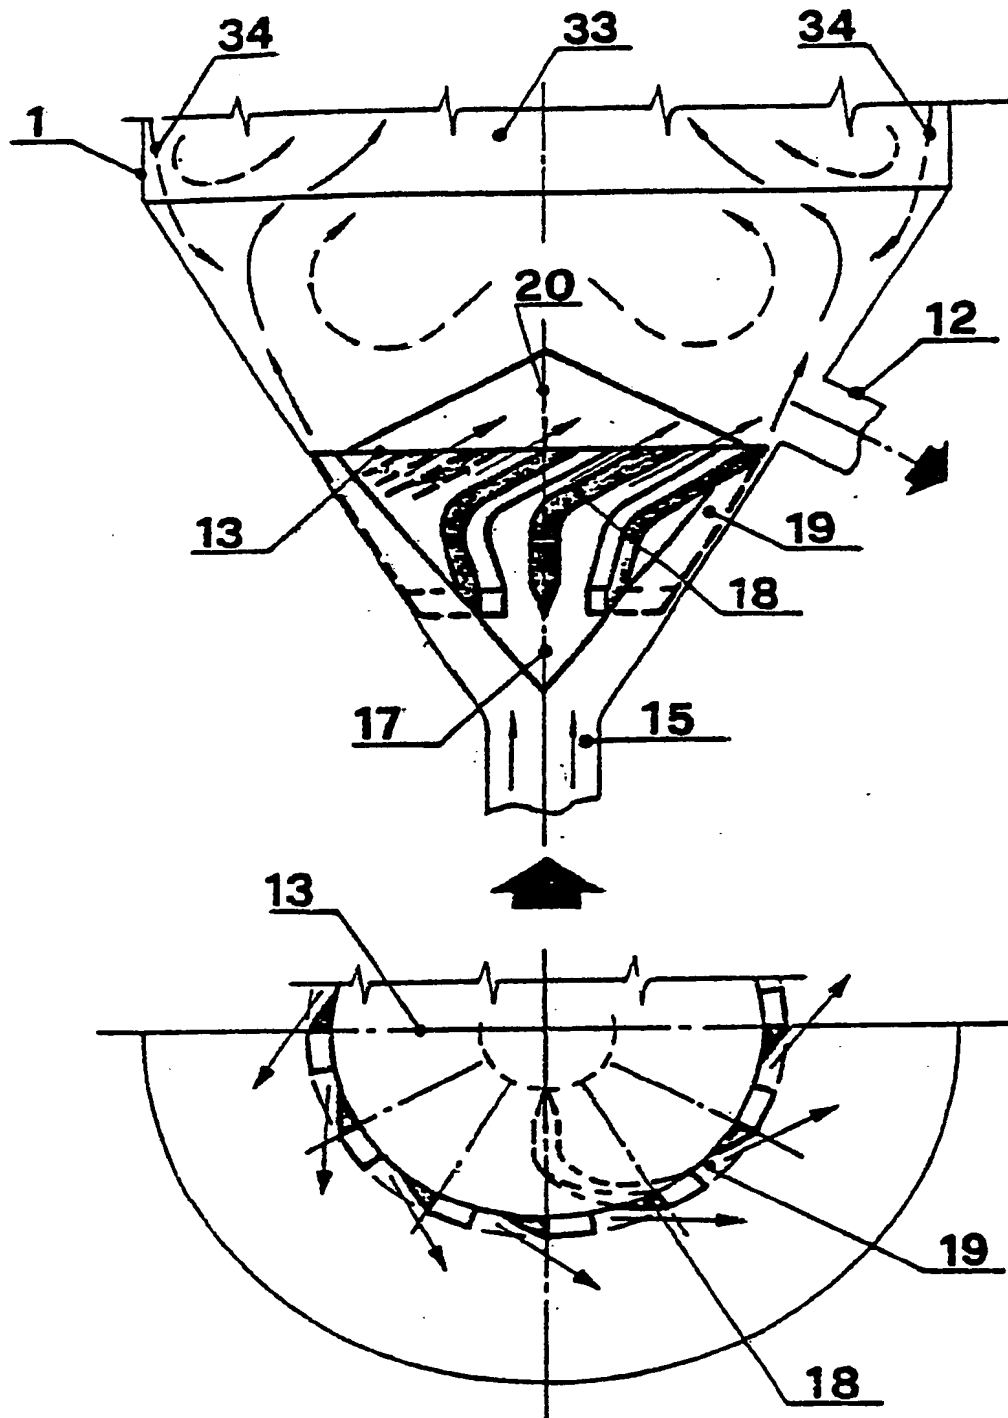


FIG. 2

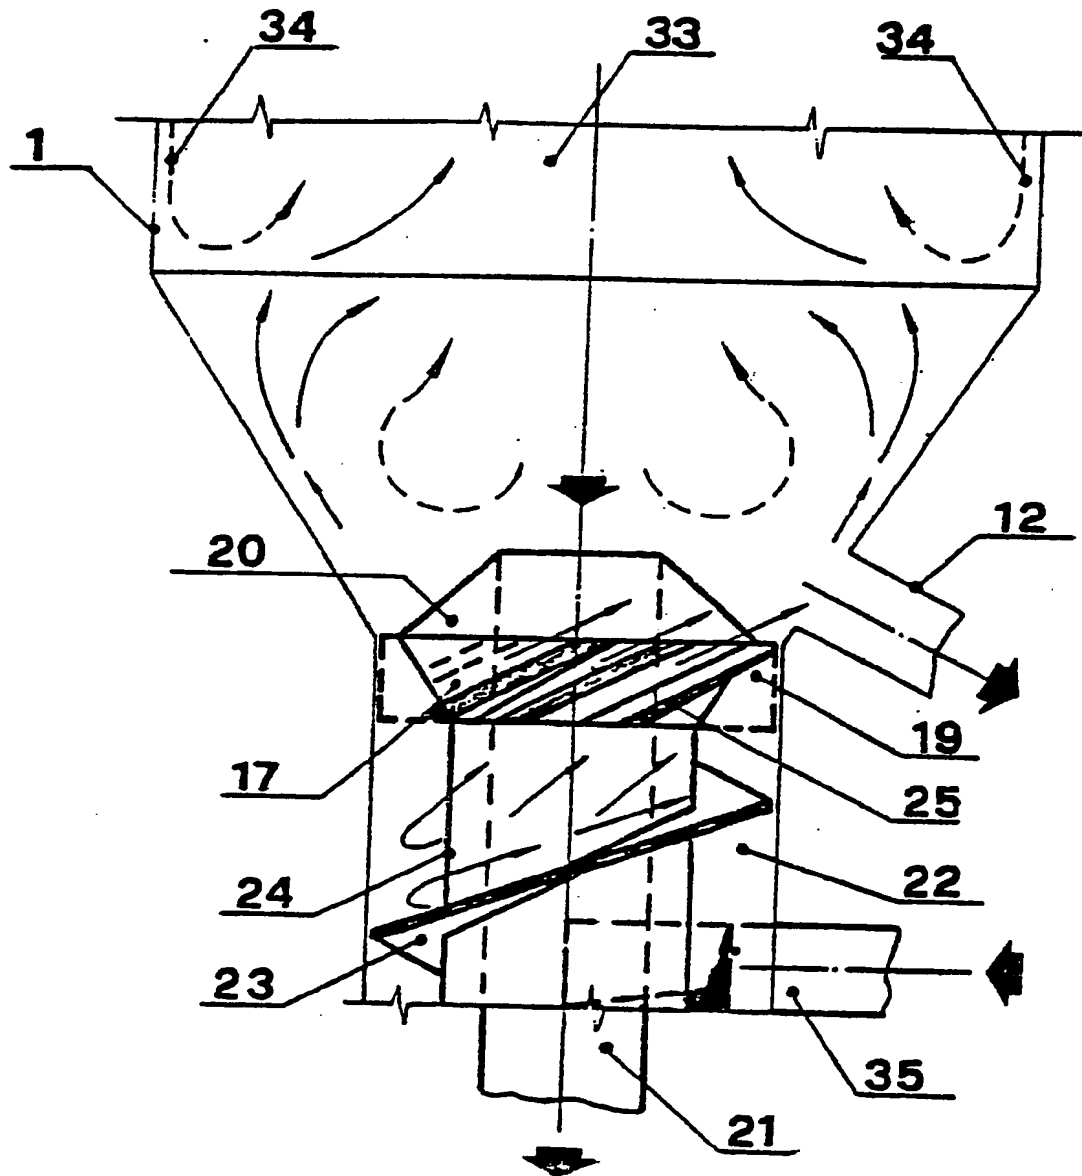


FIG. 3



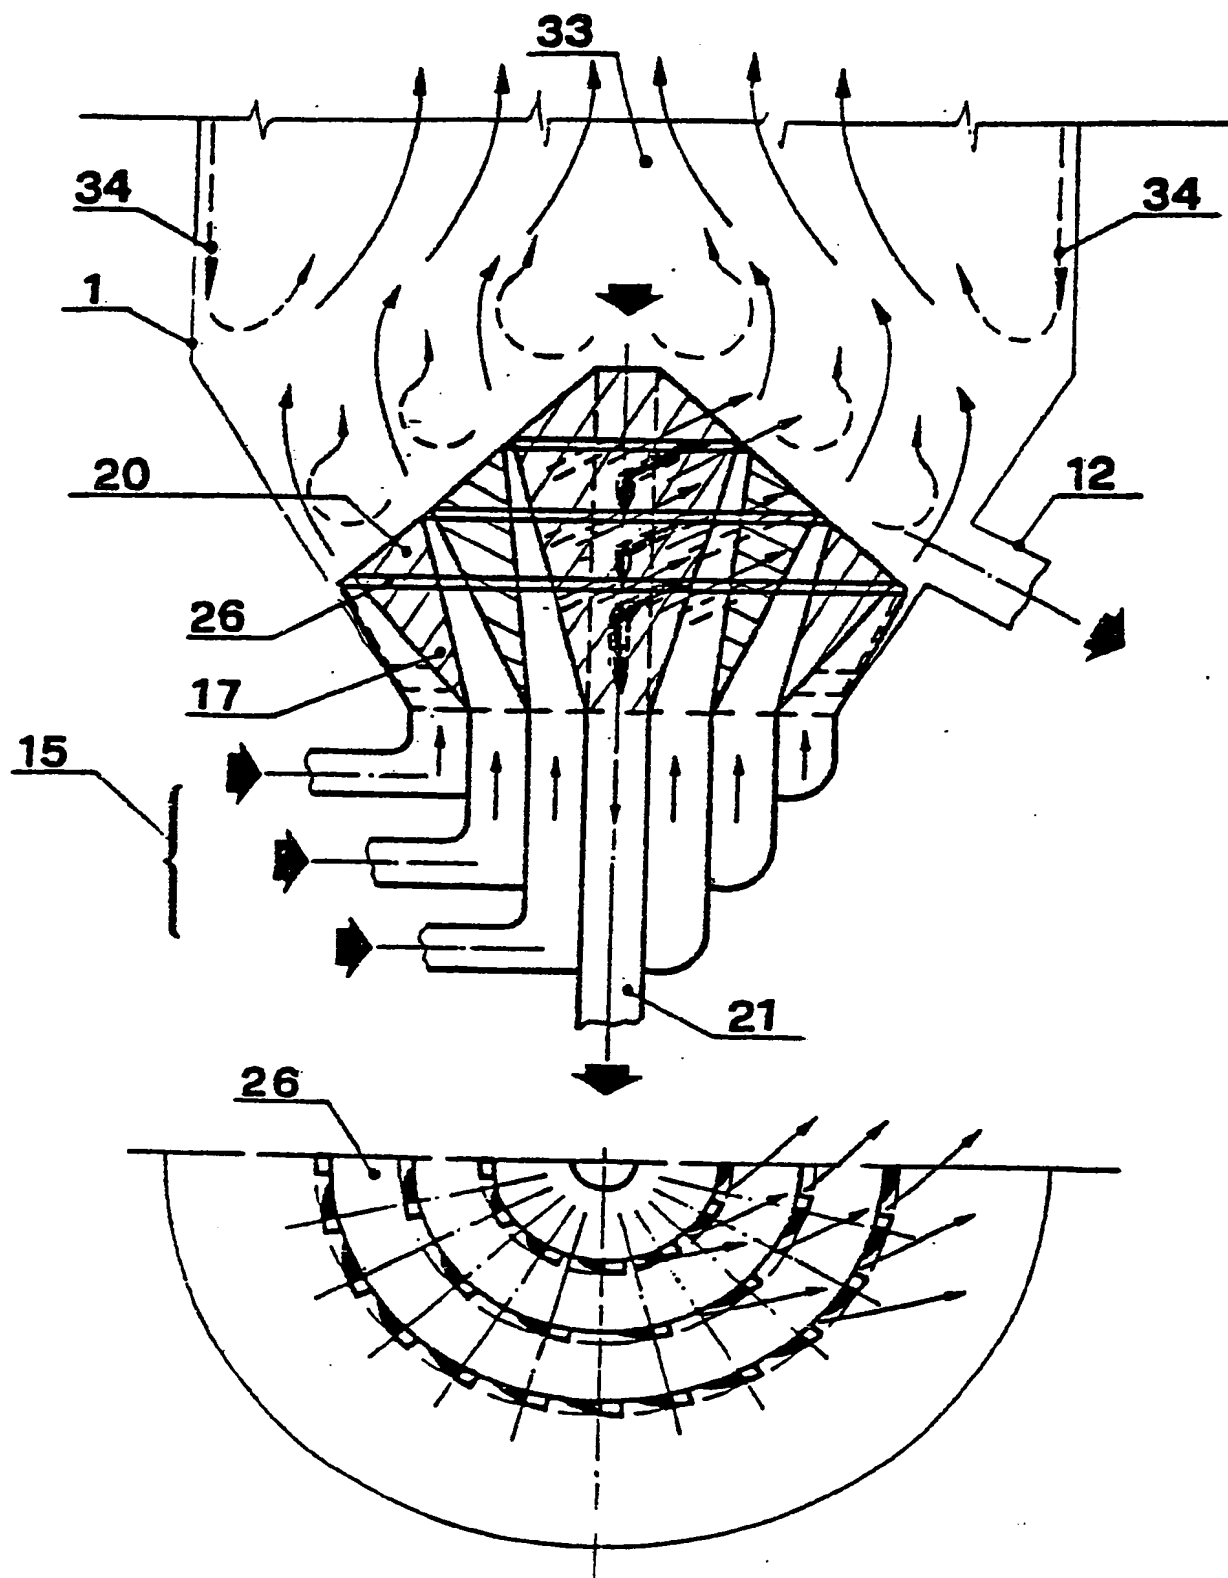


FIG.4

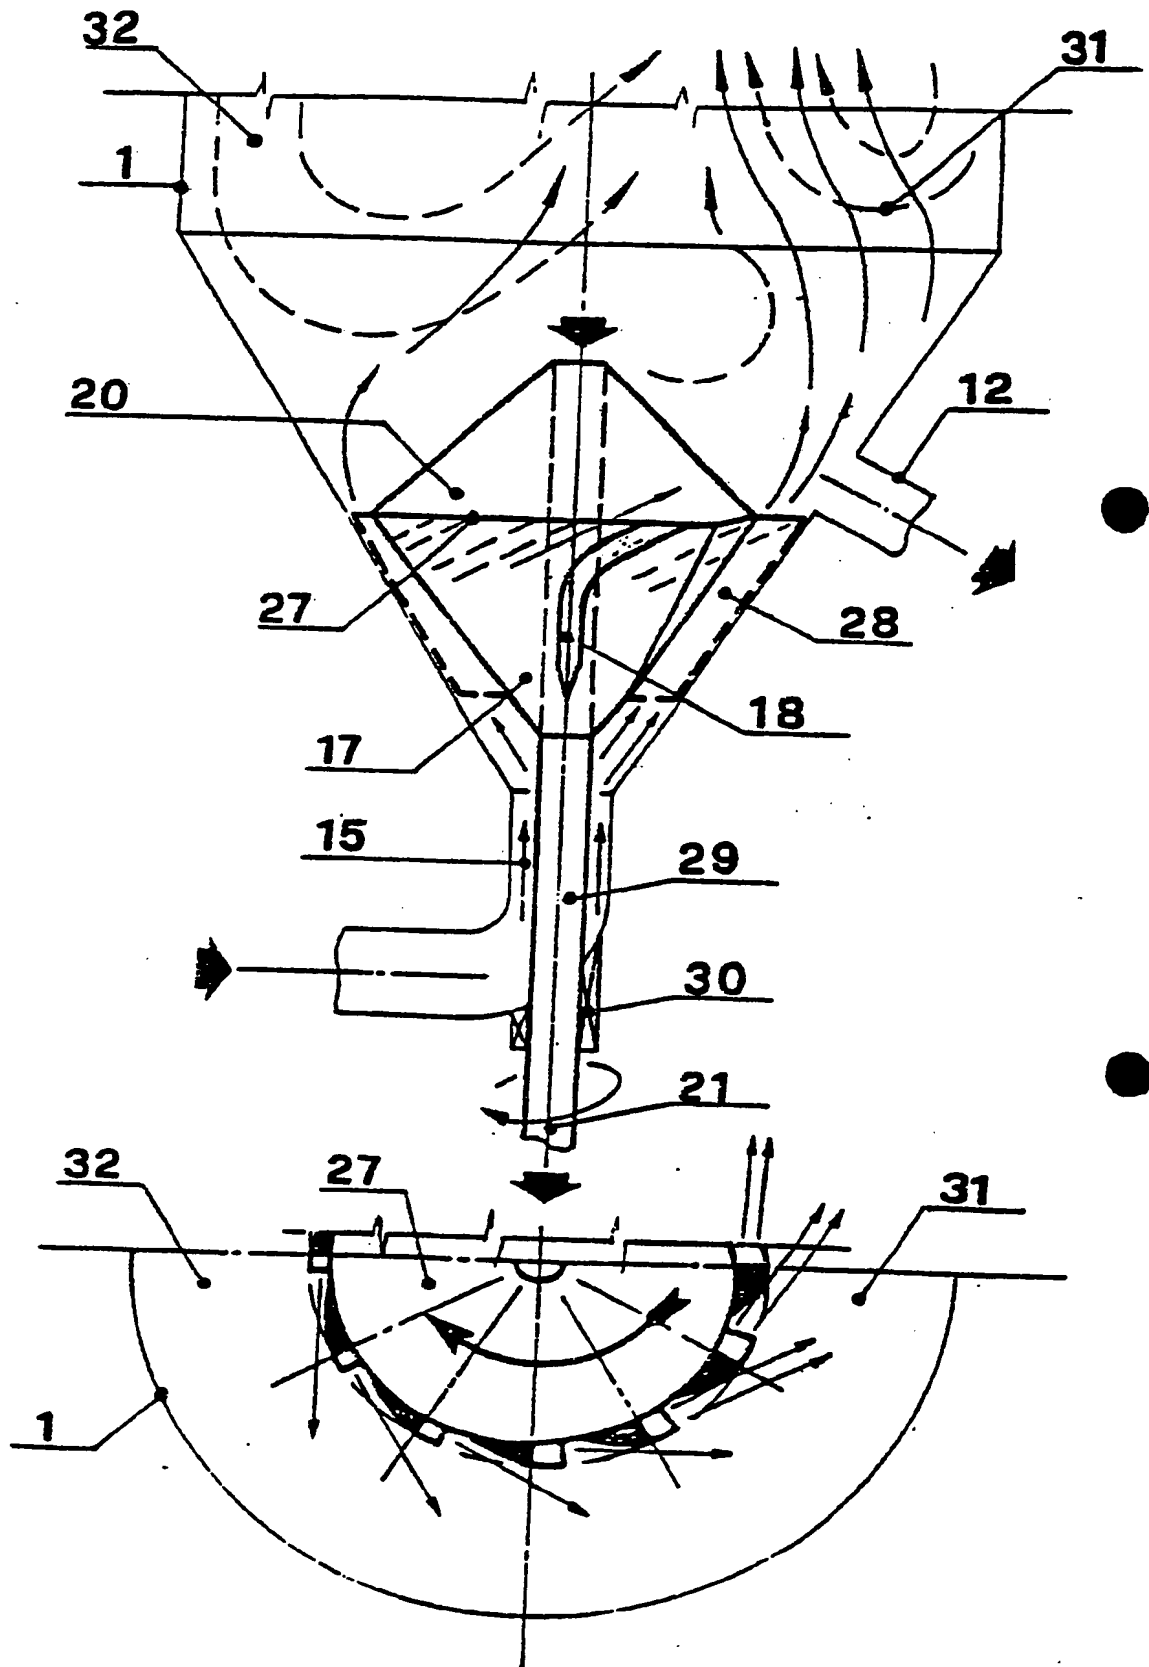

% cumulative weight

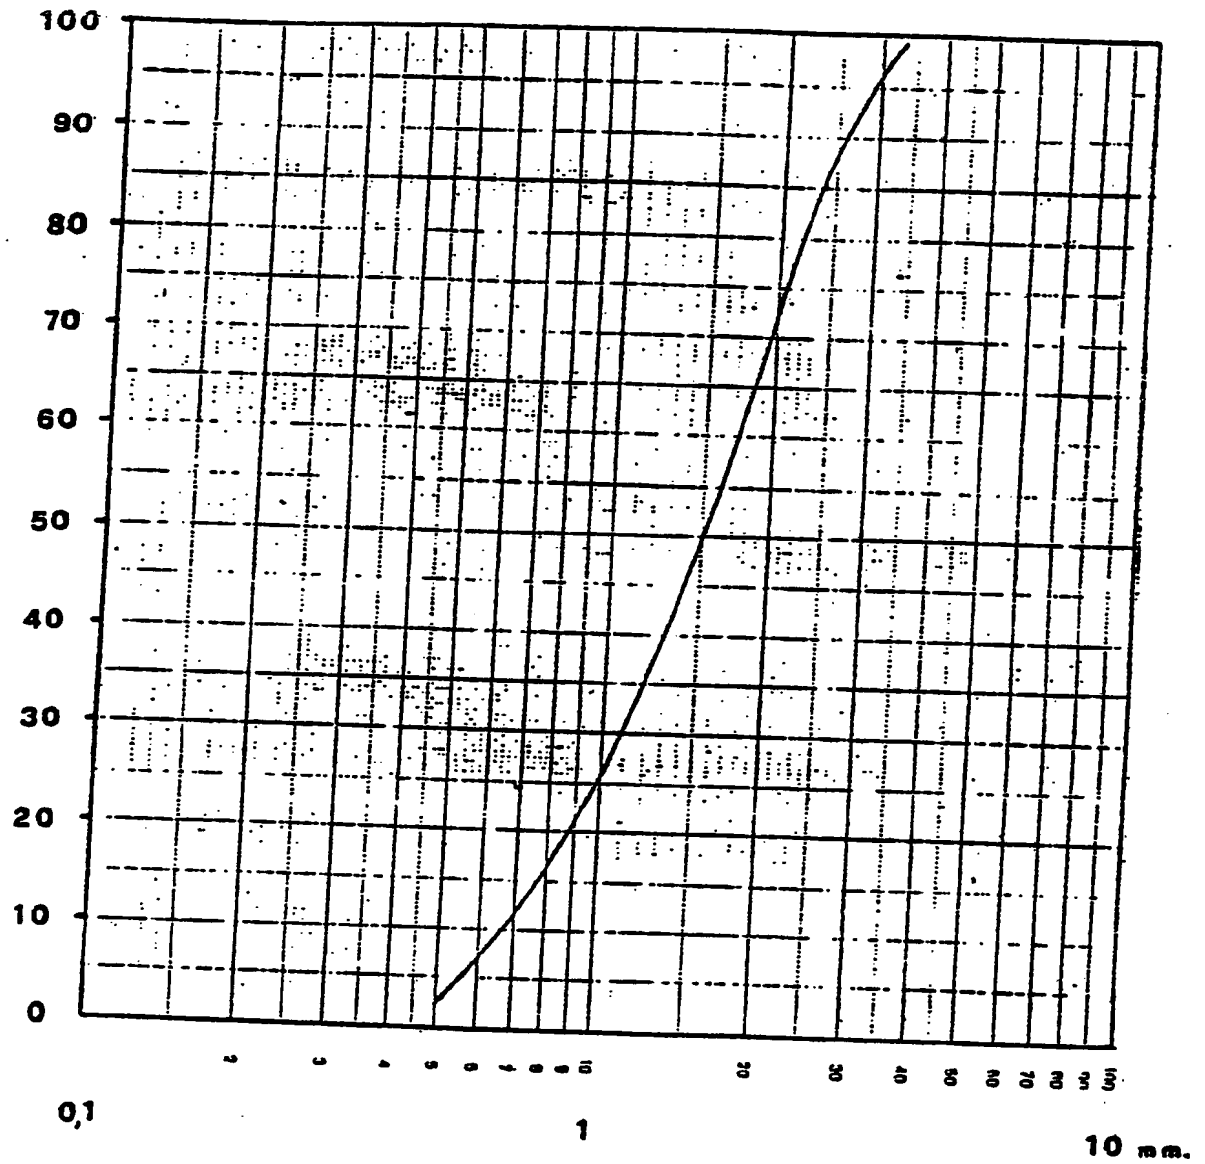

DIAMETER OF THE POLYMER PARTICLES

FIG. 6

⑫

EUROPEAN PATENT APPLICATION

⑴ Application number: 83301306.3

⑸ Int. Cl.³: **B 01 J 8/18**
C 08 F 10/00, C 08 F 2/34

⑵ Date of filing: 09.03.83

⑶ Priority: 10.03.82 IT 2006282

⑷ Date of publication of application:
14.09.83 Bulletin 83/37

⑹ Date of deferred publication of search report: 09.11.83

⑽ Designated Contracting States:
AT BE DE FR GB NL SE

⑴ Applicant: Montedison S.p.A.
31, Foro Buonaparte
I-20121 Milan(IT)

⑵ Inventor: Govoni, Gabriele
63, Via Pilastro
Renazzo Ferrara(IT)

⑶ Inventor: Corazzari, Canzio
250, Via Virgilliana
Pilastrì Ferrara(IT)

⑷ Inventor: Di Stefano, Giovanni
188, Via Marconi
Ferrara(IT)

⑸ Inventor: Loconsolo, Mauro
71, Via Ravenna
Ferrara(IT)

⑹ Representative: Whalley, Kevin et al,
Marks & Clerk 57/60 Lincoln's Inn Fields
London WC2A 3LS(GB)

⑽ Distributor for a fluidized bed reactor.

⑽ A fluidized bed reactor (1), suitable for recycling a fluidization gas containing in suspension particles of solid material, has a gas distributor (13) consisting of a double-coned body or of a series of concentric cones provided on their lateral surfaces with ribs or fins (18) forming gas inflow channels (19) shaped in such a way and with such an inclination as to allow the passage of the solid particles dragged along by the gas flow, and such as to hinder the outflow of the solid material that has been fluidized, when the flow of the gas is interrupted.

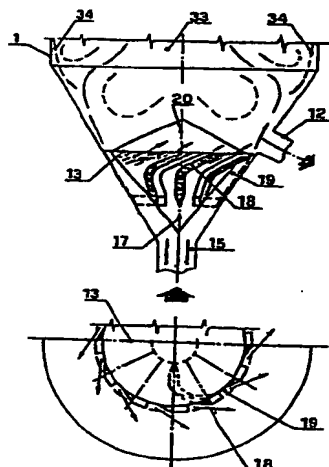


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

0088638

Application number

EP 83 30 1306

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. ³)
P,A	EP-A-0 050 519 (STONE-PLATT FLUIDFIRE LTD) * Claims 1,5,7; figures 3,5,6; page 3, line 1 - page 7, line 25 *	1-3	B 01 J 8/18 B 01 J 8/44 C 08 F 10/00 C 08 F 2/34 F 27 B 15/10
P,A	--- US-A-4 337 069 (P.M. GERMAN) * Claims 1-3; figures 1,2; column 1, line 50 - column 2, line 25; column 2, lines 52-60 *	7,8	
A	--- US-A-3 251 337 (R.E. LATTA) * Claims 1-3; figure 3; column 4, lines 32-70 *	1-3	
A	--- US-A-4 035 152 (WEN-CHING YANG) * Claims 1-3; figures 1-4; column 1, line 58 - column 3, line 30 *	1-3	
D,A	--- US-A-3 298 792 (G. DI DRUSCO) * Claims 1-6; figure 1; column 2, line 55 - column 3, line 27; column 2, lines 2-4 *	1-8	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 12-08-1983	Examiner PIELKA I.A.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO Form 1503, 03/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.